




NOVABLUETM



NOVABLUETM is our premium double braided polyester rope designed for general marine, industrial, and commercial use where low elongation, high strength, and abrasion resistance are required. Constructed from the highest quality UV stabilized yarns, Novablue's balanced core and cover construction insures easy splicing. It can be easily identified by a single blue tracer in the cover. Diameters over 1" are solid white.

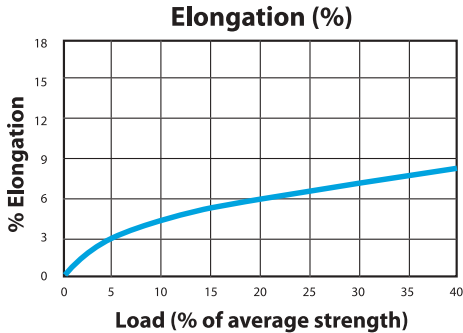

Dia. In	Size		Approx. Weight		Approx. Ave. Tensile Strength	
	Dia. MM	Circ. Inch	Lbs./100 f.	Kg/100 M	Lbs.	Kg
3/16"	5	9/16"	1.0	1.49	1,175	533
1/4"	6	3/4"	2.0	3.0	1,950	885
5/16"	8	1"	3.1	4.6	3,500	1,589
3/8"	10	1 1/8"	4.5	6.7	4,900	2,225
7/16"	11	1 1/4"	6.1	9.1	6,200	2,815
1/2"	12	1 1/2"	8.0	11.9	10,400	4,720
9/16"	14	1 3/4"	10.1	15.0	10,800	4,901
5/8"	16	2"	12.5	18.6	15,500	7,037
3/4"	18	2 1/4"	17.9	26.7	18,000	8,172
7/8"	22	2 3/4"	24.4	36.3	24,000	10,896
1"	24	3"	31.9	47.5	32,000	14,528
1 1/8"	28	3 1/2"	40.0	59.6	39,500	17,933
1 1/4"	30	3 3/4"	49.8	74.2	49,000	22,246
1 5/16"	32	4"	55.0	81.9	53,500	24,289
1 1/2"	36	4 1/2"	71.8	107.0	65,000	29,510
1 5/8"	40	5"	84.0	125.1	77,500	35,185
1 3/4"	44	5 1/2"	97.70	145.5	89,500	40,633
2"	48	6"	128.0	190.7	110,000	49,940

Features:

- Specific Gravity of 1.38
- Low Elongation
- High Strength
- Abrasion Resistance
- UV Stabilized Cover
- Urethane Coated Cover Available

Suggested Uses:

- Winch Lines
- Mooring Lines
- Pulling Lines
- Retrieval Lines

Meets or exceeds (upon request) U.S. MIL Spec # MIL-R-24677
 CDN MIL Spec #40-GP-16M



Manufactured by Novatec Braids Ltd.
 234 Water Street, Yarmouth
 Nova Scotia, Canada B5A 4P8



www.novabraid.com
 1-800-565-4212